


colour options

### Product Features

- Combines an automatic tap and hand dryer so you can wash and dry your hands at the basin, made from high grade, solid Brass.
- The 2 sheets of air are used to wipe the water from your hands into the sink. No dripping on the floor. No extra floor space needed for hand drying and washing.
- Eco-efficient high speed hand drying in it's most simple and elegant format.
- Fitted with a HEPA filter to remove 99.9% of bacteria and viruses from the drying air.
- Its plug-in back plate design ensures easy install and maintenance, allowing control box to be exchanged by a non-electrically qualified person.
- Allowing over basin drying helps to minimise washroom clean up, and prevent slips as it eliminates water spillage on floors.
- Great for washroom areas with little wall space, it is simple to attach straight to the basin.
- A brushless, carbon free motor offer it a super long service life reach to 7-10 years.
- An intelligent heating system will detect the ambient temperature of your washroom, automatically adds heat to the airflow if it senses a room temperature drop below 25°C.
- Low noise with smart air outlet design - The airflow direction and speed has been carefully configured to ensure that there is no excess splashing or spray created and therefore works with a huge range of sinks.

### Technical Specification

Body Material	Chrome Plated Brass
Voltage	220-240V
Frequency	50/60Hz
Total Power	1200W
Motor Type	Digital brushless DC motor
RPM	40000
Electrical Isolation	Class II
Hot & Cold Switch	Automatic
Current	5.5A
Air Speed	95m/s
Dimensions (mm) W x H x D	265x141x175
Filter	HEPA(H13)
Air Temperature (10 cm distance/21°C)	30-60°C
Net Weight	5.8kgs
Noise Level In Db(at 2m)	75
Water Splash Proof	IP24
Auto Cutoff	30s

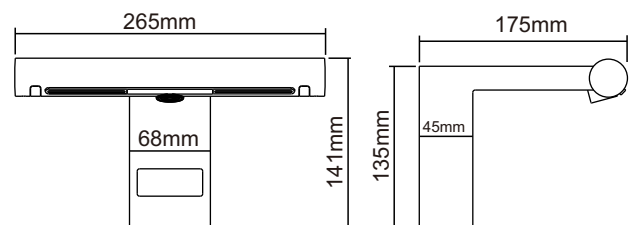

---

**TECHNICAL SPECIFICATION**


---

**Electrical**

Voltage	AC220-240V	Water Splash Proof	IP24
Frequency	50/60Hz	Insulation class	Class II
Total Power	1200W	Motor	Digital brushless DC motor
Air Speed	95m/s	Max Altitude	2000m
Drying time	10-15s	Heater type	Automatic
Max drying time	30s	Starting system	Infrared induction
Operating temperature range	0-40°C	Sensing distance	5-12cm (automatic regulation)


**Tap**

Mounting	Deck mounted	Inlet connection	G1 /2"
Operating temperature range	5-65°C	Max water outlet time	60S
Water pressure required	1-6Bar	Type of tap power	AC circuit

**Material and other data**

Body Material	Chrome Plated Brass	Tap surface	Multi-layer plating
Motor bucket cover	ABS	Air outlet material	ABS+PC
Filter material	Glass Fibreglass	Filter rating	HEPA(H13)
Tap Dimensions(mm)	265Wx141Hx175D	Motor bucket Dimensions(mm)	210Wx290Hx190D
Pipe length	400mm	Opening hole diameter	Ø35mm
Unfitted sink	Highly polished surfaces (This may cause self-induction )	Min sink depth	100mm

Product Size

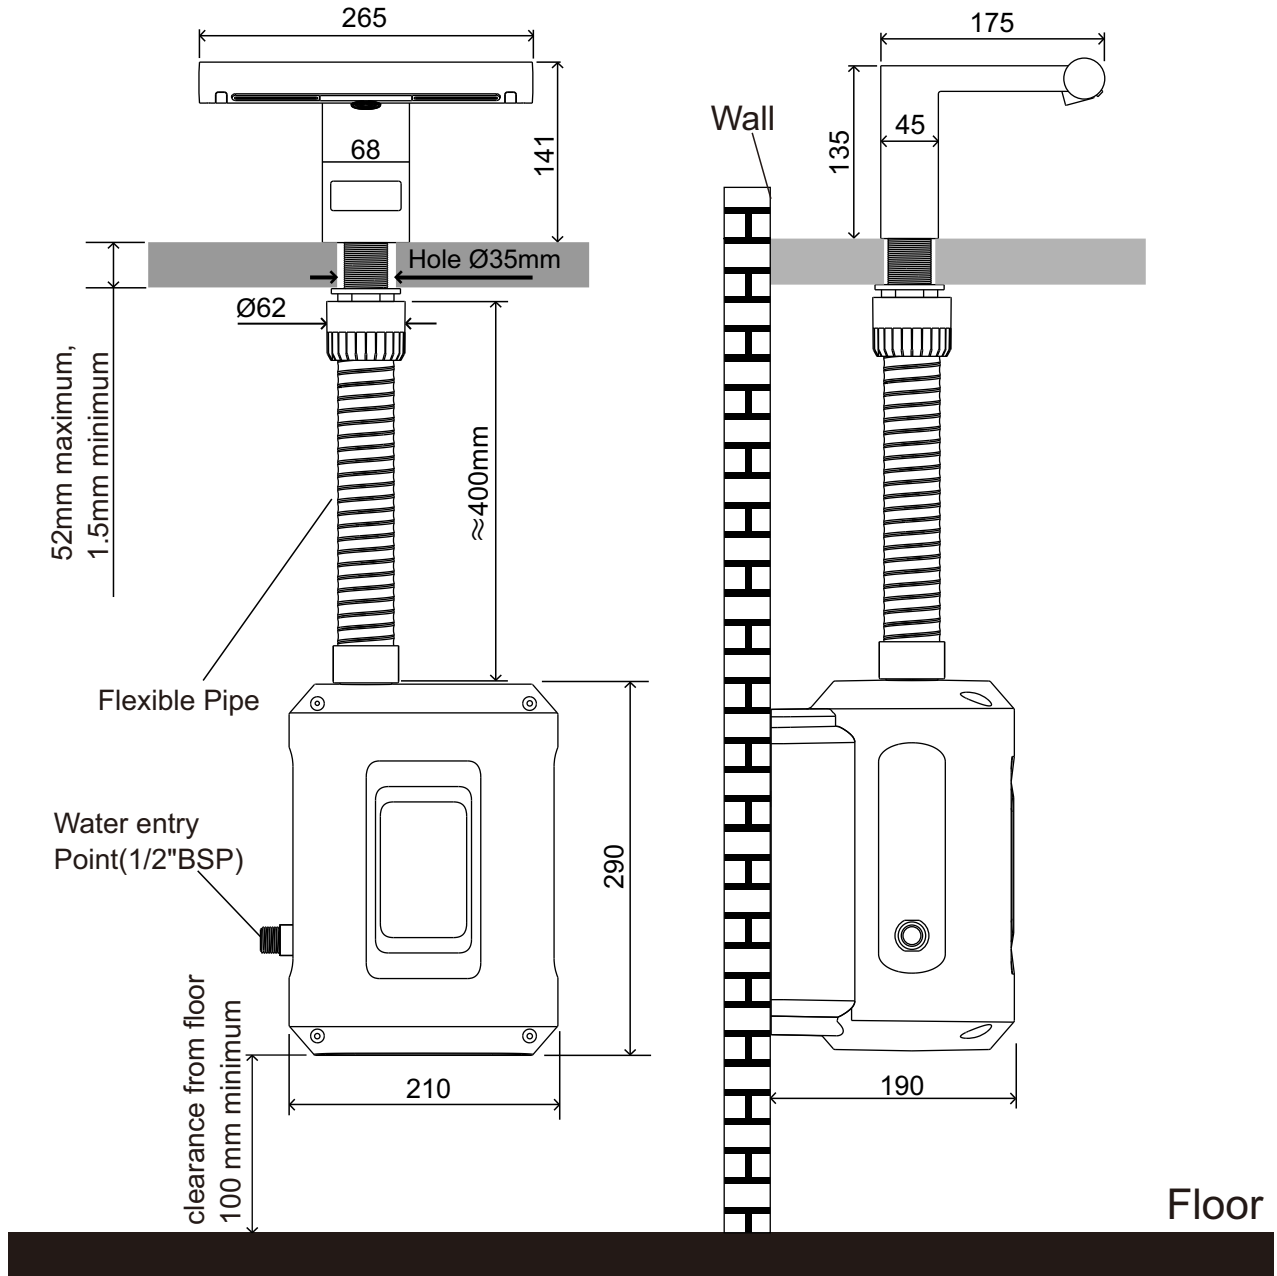

All dimensions shown in mm