


Product Features

- Combines an automatic tap and hand dryer so you can wash and dry your hands at the basin, made from high grade, solid Brass.
- The 2 sheets of air are used to wipe the water from your hands into the sink. No dripping on the floor. No extra floor space needed for hand drying and washing.
- Eco-efficient high speed hand drying in it's most simple and elegant format.
- Fitted with a HEPA filter to remove 99.9% of bacteria and viruses from the drying air.
- Its plug-in back plate design ensures easy install and maintenance, allowing control box to be exchanged by a non-electrically qualified person.
- Allowing over basin drying helps to minimise washroom clean up, and prevent slips as it eliminates water spillage on floors.
- Great for washroom areas with little wall space, it is simple to attach straight to the basin.
- A brushless, carbon free motor offer it a super long service life reach to 7-10 years.
- An intelligent heating system will detect the ambient temperature of your washroom, automatically adds heat to the airflow if it senses a room temperature drop below 25°C.
- Low noise with smart air outlet design - The airflow direction and speed has been carefully configured to ensure that there is no excess splashing or spray created and therefore works with a huge range of sinks.

Technical Specification

| | |
|---------------------------------------|----------------------------|
| Body Material | Chrome Plated Brass |
| Voltage | 220-240V |
| Frequency | 50/60Hz |
| Total Power | 1200W |
| Motor Type | Digital brushless DC motor |
| RPM | 40000 |
| Electrical Isolation | Class II |
| Hot & Cold Switch | Automatic |
| Current | 5.5A |
| Air Speed | 95m/s |
| Dimensions (mm) W x H x D | 265x67x230 |
| Filter | HEPA(H13) |
| Air Temperature (10 cm distance/21°C) | 30-60°C |
| Net Weight | 5.8kgs |
| Noise Level In Db(at 2m) | 75 |
| Water Splash Proof | IP24 |
| Auto Cutoff | 30s |

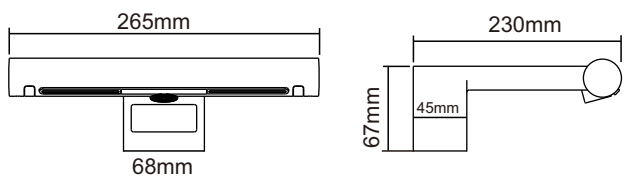

TECHNICAL SPECIFICATION

Electrical

| | | | |
|-----------------------------|------------|--------------------|-------------------------------|
| Voltage | AC220-240V | Water Splash Proof | IP24 |
| Frequency | 50/60Hz | Insulation class | Class II |
| Total Power | 1200W | Motor | Digital brushless DC motor |
| Air Speed | 95m/s | Max Altitude | 2000m |
| Drying time | 10-15s | Heater type | Automatic |
| Max drying time | 30s | Starting system | Infrared induction |
| Operating temperature range | 0-40℃ | Sensing distance | 5-12cm (automatic regulation) |


Tap

| | | | |
|-----------------------------|--------------|-----------------------|------------|
| Mounting | Wall mounted | Inlet connection | G1 /2" |
| Operating temperature range | 5-65℃ | Max water outlet time | 60S |
| Water pressure required | 1-6Bar | Type of tap power | AC circuit |

Material and other data

| | | | |
|--------------------|--|-----------------------------|---------------------|
| Body Material | Chrome Plated Brass | Tap surface | Multi-layer plating |
| Motor bucket cover | ABS | Air outlet material | ABS+PC |
| Filter material | Glass Fibreglass | Filter rating | HEPA(H13) |
| Tap Dimensions(mm) | 265Wx67Hx230D | Motor bucket Dimensions(mm) | 210Wx290Hx190D |
| Pipe length | 400mm | Opening hole diameter | Ø35mm |
| Unfitted sink | Highly polished surfaces (This may cause self-induction) | Min sink depth | 100mm |

Product Size

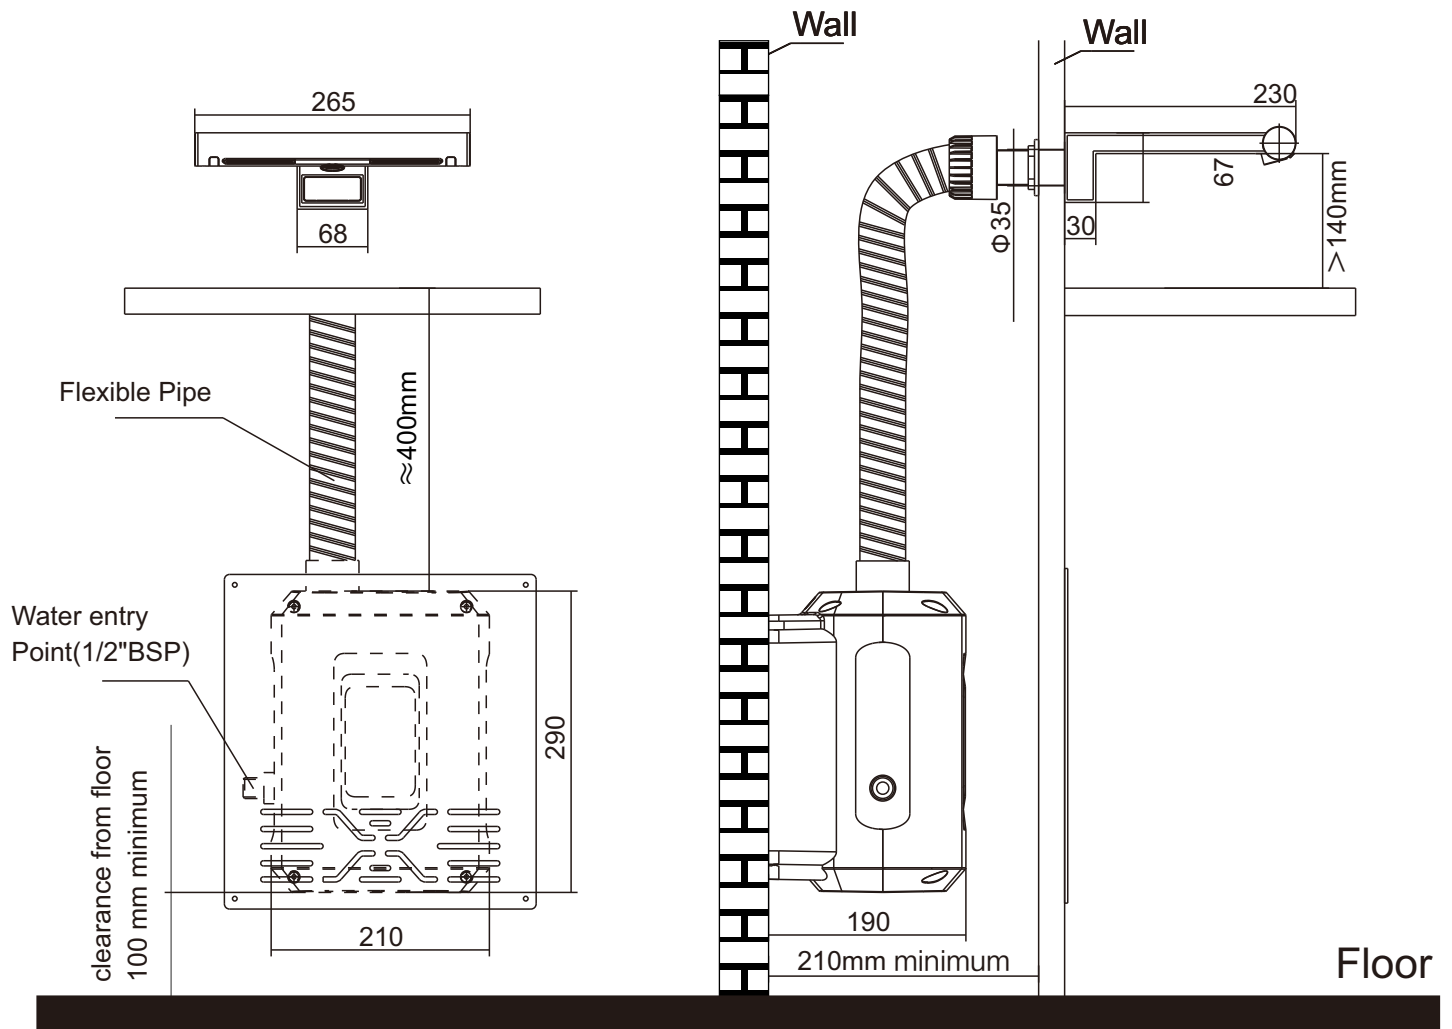

All dimensions shown in mm