



colour options

Product Features

- Combines an automatic tap and hand dryer so you can wash and dry your hands at the basin, made from high grade, stainless steel 304.
- The 2 sheets of air are used to wipe the water from your hands into the sink. No dripping on the floor. No extra floor space needed for hand drying and washing.
- Eco-efficient high speed hand drying in it's most simple and elegant format.
- Fitted with a HEPA filter to remove 99.9% of bacteria and viruses from the drying air.
- Its plug-in back plate design ensures easy install and maintenance, allowing control box to be exchanged by a non-electrically qualified person.
- Allowing over basin drying helps to minimise washroom clean up, and prevent slips as it eliminates water spillage on floors.
- Great for washroom areas with little wall space, it is simple to attach straight to the basin.
- A brushless, carbon free motor offer it a super long service life reach to 7-10 years.
- An intelligent heating system will detect the ambient temperature of your washroom, automatically adds heat to the airflow if it senses a room temperature drop below 25°C.
- Low noise with smart air outlet design - The airflow direction and speed has been carefully configured to ensure that there is no excess splashing or spray created and therefore works with a huge range of sinks.

Technical Specification

Body Material	Stainless steel 304
Voltage	110V
Frequency	60Hz
Total Power	1200W
Motor Type	Digital brushless DC motor
RPM	40000
Electrical Isolation	Class II
Hot & Cold Switch	Automatic
Current	5.5A
Air Speed	95m/s
Dimensions (mm) W x H x D	264x170x196
Filter	HEPA(H13)
Air Temperature (10 cm distance/21°C)	30-60°C
Net Weight	5.8kgs
Noise Level In Db(at 2m)	75
Water Splash Proof	IP24
Auto Cutoff	30s

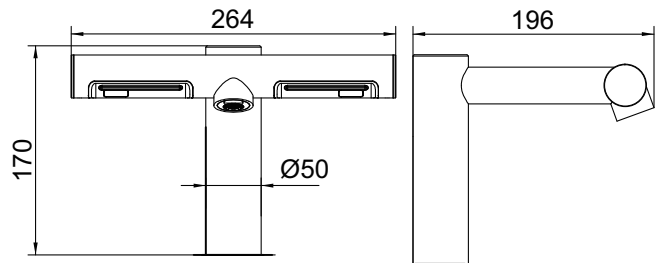

TECHNICAL SPECIFICATION

Electrical

Voltage	AC110V	Water Splash Proof	IP24
Frequency	60Hz	Insulation class	Class II
Total Power	1200W	Motor	Digital brushless DC motor
Air Speed	95m/s	Max Altitude	4000m
Drying time	10-15s	Heater type	Automatic
Max drying time	30s	Starting system	Infrared induction
Operating temperature range	0-40°C	Sensing distance	5-12cm (automatic regulation)


Tap

Mounting	Deck mounted	Inlet connection	G1 /2"
Operating temperature range	5-65°C	Max water outlet time	60S
Water pressure required	1-6Bar	Type of tap power	AC circuit

Material and other data

Body Material	Stainless steel 304	Tap surface	Multi-layer plating
Motor bucket cover	ABS	Air outlet material	ABS+PC
Filter material	Glass Fibreglass	Filter rating	HEPA(H13)
Tap Dimensions(mm)	264Wx170Hx196D	Motor bucket Dimensions(mm)	210Wx290Hx190D
Pipe length	400mm	Opening hole diameter	Ø35mm
Unfitted sink	Highly polished surfaces (This may cause self-induction)	Min sink depth	100mm

Product Size

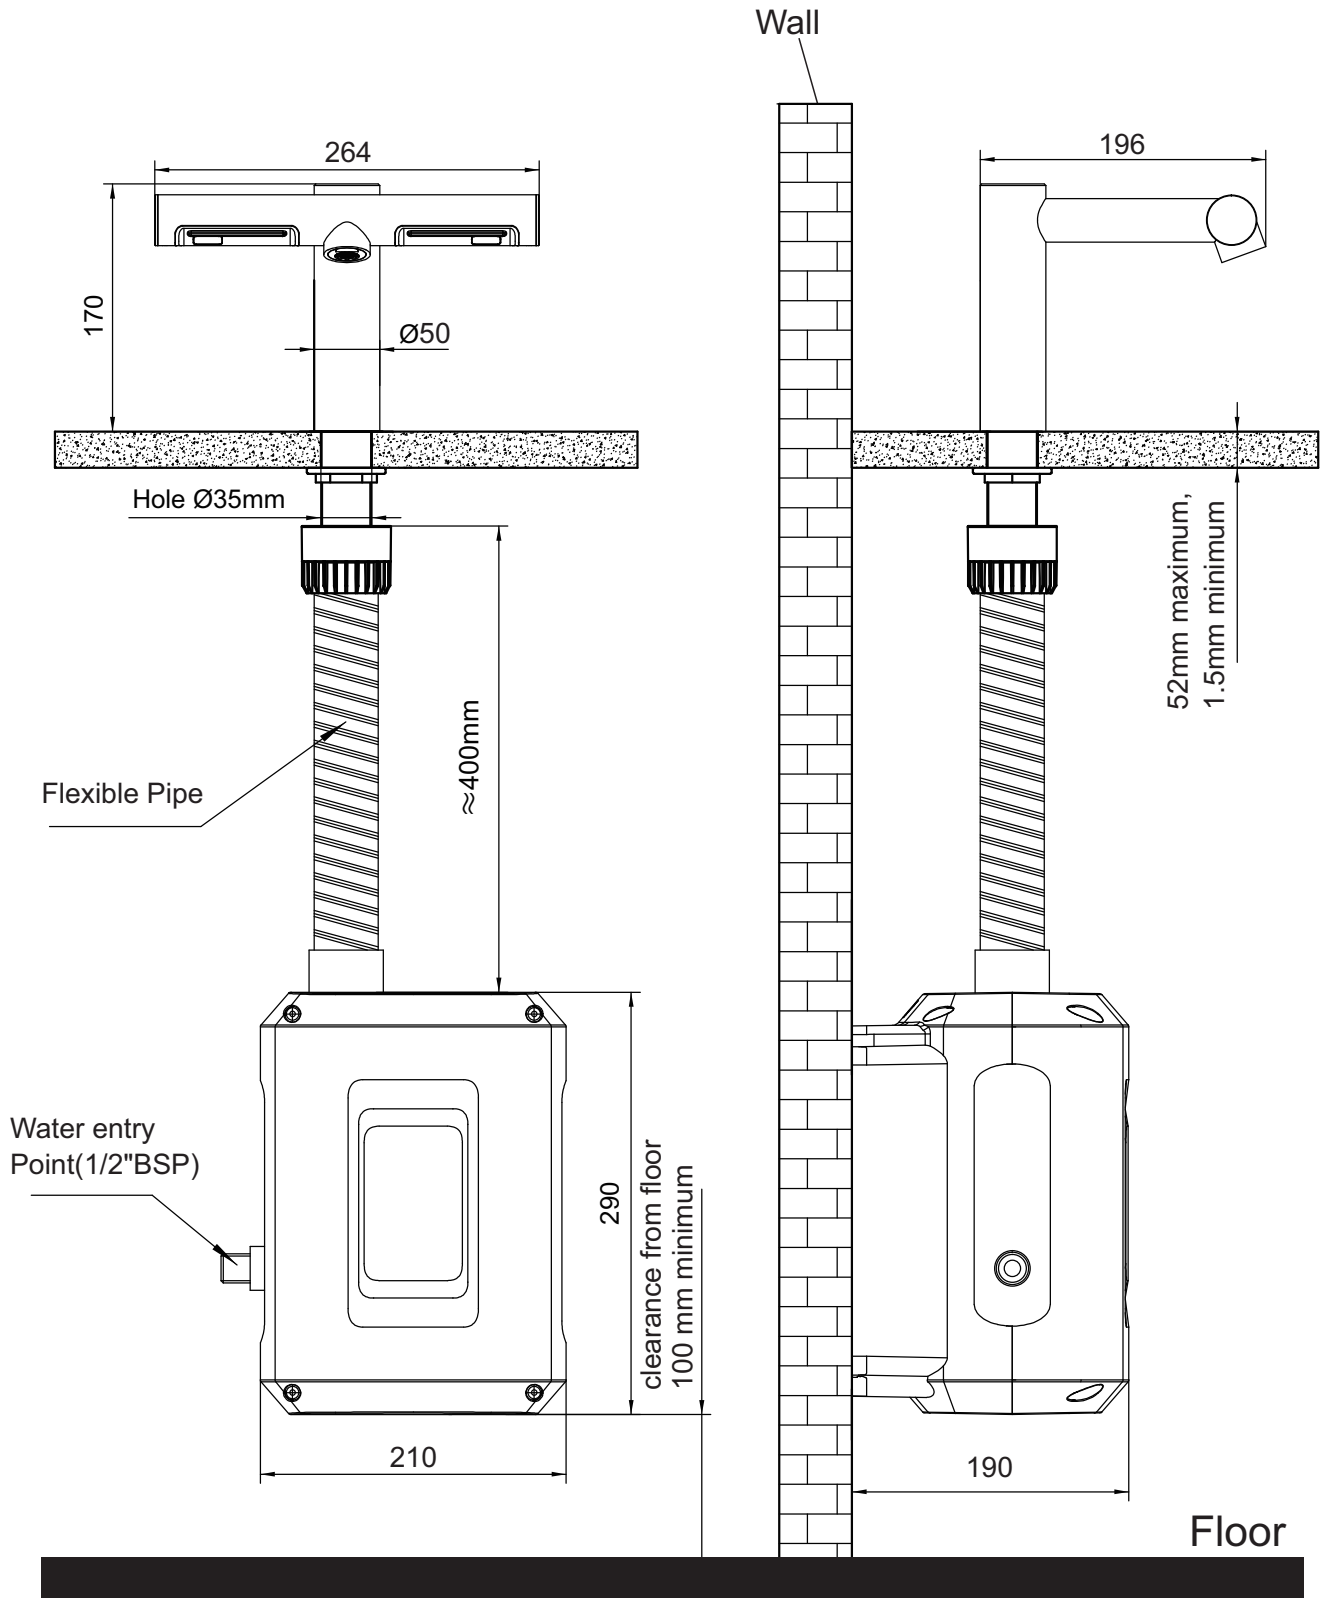

All dimensions shown in mm